



PRO Series

Piston
compressor
range



Compressed air at your service




PRO Series

Direct drive and Belt driven piston compressors

ABAC PRO single stage piston compressors combine high user comfort with great durability and efficient performance. All the units are equipped with the ABAC belt guard, providing an optimal air flow over the pump. The pumps run at low speed and come with aftercoolers to reduce operating temperatures more than ever before.

Applications

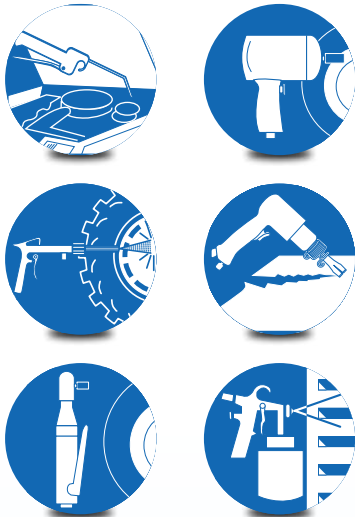

Efficiency
Highly innovative belt guard improving the cooling air flow over the pump

Durability
Standard aftercooler on the new highly durable and slower running pump.



User comfort
With maximum feet, extra rubber handles and lockable pivot wheels

Direct Drive	Part Number	Tank	Pump	l/min	CFM	HP	kW	rpm	Volt	Bar	L x W x H (mm)	Kg
	START O20P UK	4116023493	6L	Oil Free	230	8.1	2	1.5	2850	230/1/50	8	535 x 215 x 535
POLE POSITION O20P	4116023494	24L	Oil Free	230	8.1	2	1.5	2850	230/1/50	8	570 x 250 x 590	24.5
POLE POSITION L30P	4116023501	24L	Lubricated	310	10.9	3	2.2	2850	230/1/50	10	570 x 255 x 590	33
MONTECARLO O20P	4116023495	50L	Oil Free	230	8.1	2	1.5	2850	230/1/50	8	770 x 310 x 645	30.5
MONTECARLO L30P	4116023502	50L	Lubricated	310	10.9	3	2.2	2850	230/1/50	10	770 x 310 x 645	36.5

Belt Drive	Part Number	Tank	Air Displacement		Free Air Delivered		Noise		Motor			Bar	L x W x H (mm)	Kg	
			l/min	CFM	l/min	CFM	dB(A)	Lw(A)	HP	kW	rpm				Volt
A29B 50 CM2	4116024556	50L	255	8.9	175	6.2	73	93	2	1.5	1075	230/1/50	10	847 x 395 x 796	45
A29B 50 CM3	4116024949	50L	317	11.2	224	7.9	73	93	3	2.2	1050	230/1/50	10	847 x 395 x 796	45
A29B 90 CM3	4116024950	90L	317	11.2	224	7.9	73	93	3	2.2	1050	230/1/50	10	968 x 474 x 870	52
A39B 90 CM3	4116025017	90L	393	13.8	280	10.1	73	93	3	2.2	1050	230/1/50	10	968 x 474 x 910	67
A39B 150 FM3	4116025015	150L	393	13.8	280	10.1	73	93	3	2.2	1050	230/1/50	10	1272 x 403 x 934	80
A39B 150 FT3	4116024539	150L	393	13.8	280	10.1	73	93	3	2.2	1050	400/3/50	10	1272 x 403 x 934	80
A39B 200 FM3	4116025016	200L	393	13.8	280	10.1	73	93	3	2.2	1050	230/1/50	10	1404 x 446 x 934	115
A39B 200 FT3	4116024541	200L	393	13.8	280	10.1	73	93	3	2.2	1050	400/3/50	10	1404 x 446 x 934	115
B4900 200 FT4	4116019614	200L	514	18	393	13.8	78	98	4	3	1400	400/3/50	11	1404 x 460 x 942	130
B5900B 200 FT5.5	4116019759	200L	653	22.9	500	17.7	78	98	5.5	4	1400	400/3/50	11	1404 x 488 x 983	132
B6000 270 FT7.5	4116020193	270L	827	28.9	650	23	78	98	7.5	5.5	1400	400/3/50	11	1490 x 506 x 1055	174
B7000 270 FT10 YD	4116020794	270L	1210	42.4	960	33.9	78	98	10	7.5	1300	400/3/50	11	1490 x 523 x 1200	175
A39 270 FM3 Tandem*	4116024868	270L	786	27.6	560	20.2	73	93	6	4.4	1050	230/1/50	10	1570 x 470 x 1030	153

* A39 Tandem Unit requires 32Amp, 230/1/50 supply. Model Description :- C = Receiver on Wheels, F = Receiver is Floor Mounted



Your Authorised Distributor

Compressed air at your service